

# B500005



### ► 主要技术特性 (Main Specifications)

- 适用导线规格 (Applicable wire) :—
- 适用基板厚度 (Applicable PC board thickness) :1.6mm
- 温度范围 (Temperature range) : -25°C ~ +85°C
- 额定电压 (Voltage rating) : 250V AC, DC
- 额定电流 (Current rating) : 10A AC, DC
- 接触电阻 (Contact resistance) :  $\leq 0.02\Omega$
- 绝缘电阻 (Insulation resistance) :  $\geq 1000M\Omega$
- 耐压 (Withstanding voltage) : 1500V AC/minute

### 材料及电镀规格 Material and Finish

型号 Type	材料 Material	材料厚度 Material Thickness	电镀规格 Finish
插座 WAFER	塑胶 HOUSING	PA66 UL94V-0	N/A
	针 PIN	黄铜 Brass	镀锡 Tin-plated
孔座 HOUSING	PA66 UL94V-0	—	N/A

### 产品尺寸图 Product size chart

 单位: mm 一般公差:  $\pm 0.20$ 






### WAFER

B500005-1-02

521382-2






B500005-1-04

MG612947-4A

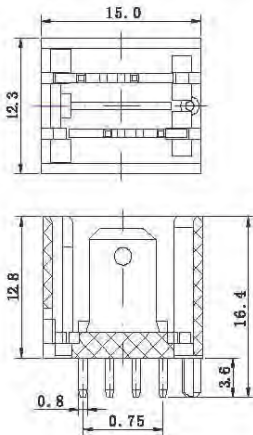

B500005-1-05-3


B500005-1-07-4

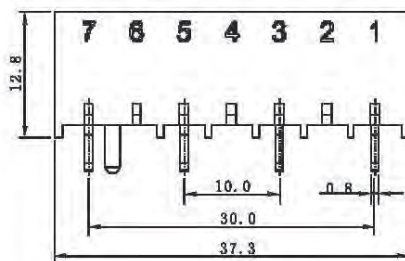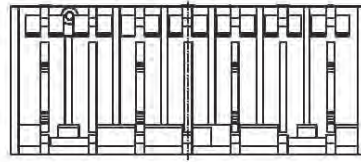


# B500005

## HOUSING


B500005-2-02 5-1241965-2

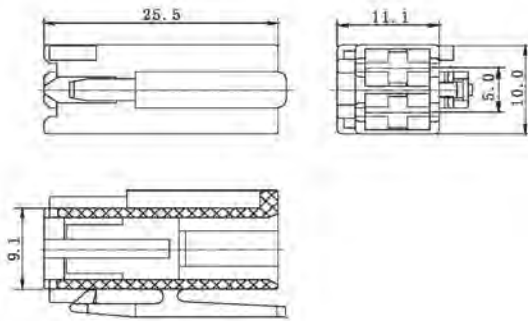


B500005-2-03 928247-3

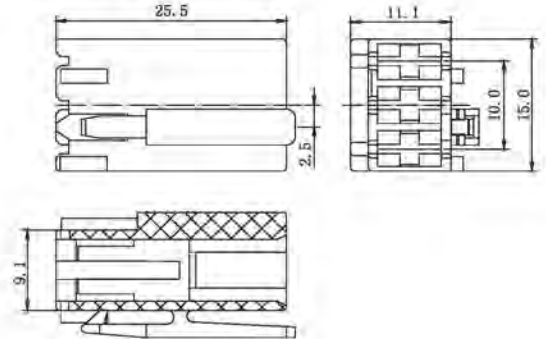


B500005-2-03-1 928247-3/1

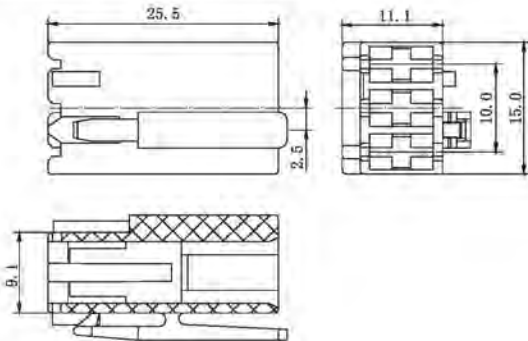


B500005-2-03A 928247-3A

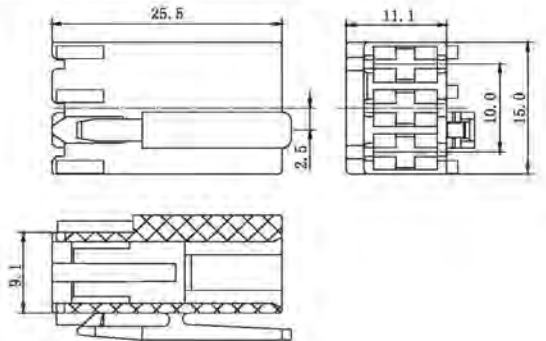

B500005-2-04-1 928247-4-1

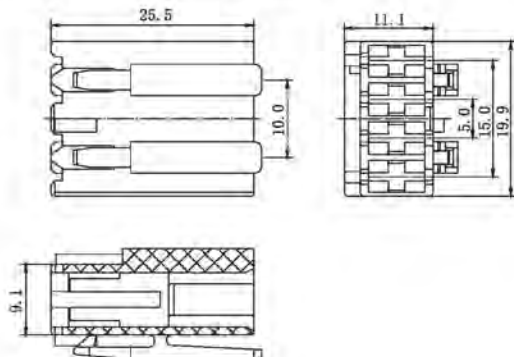

B500005-2-04-2 1241965-4

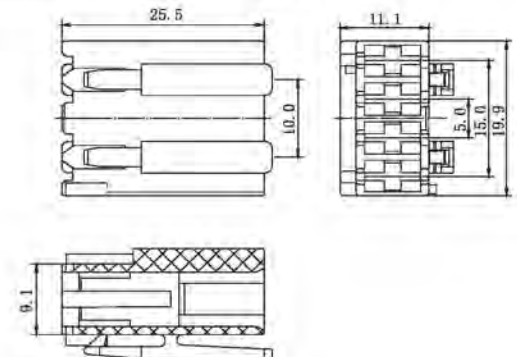

B500005-2-05 928247-5

